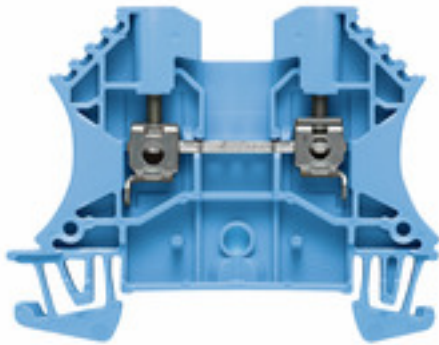


**WDU 2.5 BL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

To feed through power, signal, and data is the classical requirement in electrical engineering and panel building. The insulating material, the connection system and the design of the terminal blocks are the differentiating features. A feed-through terminal block is suitable for joining and/or connecting one or more conductors. They could have one or more connection levels that are on the same potential or insulated against one another.

**General ordering data**

|            |                                                                                                                                                                  |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Version    | Feed-through terminal block, Screw connection, blue, 2.5 mm <sup>2</sup> , 24 A, 800 V, Number of connections: 2, Number of levels: 1, TS 35, V-0, Wemid, 130 °C |
| Order No.  | <a href="#">1020080000</a>                                                                                                                                       |
| Type       | WDU 2.5 BL                                                                                                                                                       |
| GTIN (EAN) | 4008190163235                                                                                                                                                    |
| Qty.       | 100 pc(s).                                                                                                                                                       |

## WDU 2.5 BL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Depth      | 46.5 mm | Depth (inches)  | 1.831 inch |
| Height     | 60 mm   | Height (inches) | 2.362 inch |
| Width      | 5.1 mm  | Width (inches)  | 0.201 inch |
| Net weight | 7.43 g  |                 |            |

## Temperatures

|                                  |                |                                  |                                                                                                   |
|----------------------------------|----------------|----------------------------------|---------------------------------------------------------------------------------------------------|
| Storage temperature              |                | Operating temperature range      | For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity |
|                                  | -25 °C...55 °C |                                  |                                                                                                   |
| Continuous operating temp., min. | -60 °C         | Continuous operating temp., max. | 130 °C                                                                                            |

## Material data

|                           |       |        |      |
|---------------------------|-------|--------|------|
| Material                  | Wemid | Colour | blue |
| UL 94 flammability rating | V-0   |        |      |

## Rating data IECEx/ATEX

|                                |                                                                                                   |                                 |                     |
|--------------------------------|---------------------------------------------------------------------------------------------------|---------------------------------|---------------------|
| Certificate No. (ATEX)         | DEMKO14ATEX1338U                                                                                  | Certificate No. (IECEX)         | IECEXULD14.0005U    |
| Max. voltage (ATEX)            | 690 V                                                                                             | Current (ATEX)                  | 24 A                |
| Wire cross section max. (ATEX) | 2.5 mm <sup>2</sup>                                                                               | Max. voltage (IECEX)            | 690 V               |
| Current (IECEX)                | 24 A                                                                                              | Wire cross section max. (IECEX) | 2.5 mm <sup>2</sup> |
| Operating temperature range    | For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity | Marking EN 60079-7              |                     |
| Ex 2014/34/EU label            | II 2 G D                                                                                          |                                 | Ex eb II C Gb       |

## System specifications

|                                     |                                                                                                          |                               |     |
|-------------------------------------|----------------------------------------------------------------------------------------------------------|-------------------------------|-----|
| Version                             | Screw connection, for plug-in cross-connector, for screwable cross-connection, One end without connector | End cover plate required      |     |
|                                     |                                                                                                          |                               | Yes |
| Number of potentials                | 1                                                                                                        | Number of levels              | 1   |
| Number of clamping points per level | 2                                                                                                        | Number of potentials per tier | 1   |
| Levels cross-connected internally   | No                                                                                                       | PE connection                 | No  |
| Rail                                | TS 35                                                                                                    | N-function                    | Yes |
| PE function                         | No                                                                                                       | PEN function                  | No  |

## 2 clampable conductors (H05V/H07V) with equal cross-section (rated connection)

|                                                                                                            |                     |                                                                                                            |                     |
|------------------------------------------------------------------------------------------------------------|---------------------|------------------------------------------------------------------------------------------------------------|---------------------|
| Cross-section for connected wire, solid, two clampable wires, max.                                         | 1.5 mm <sup>2</sup> | Cross-section for connected wire, solid, two clampable wires, min.                                         | 0.5 mm <sup>2</sup> |
| Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, 2 clampable wires, max. | 1.5 mm <sup>2</sup> | Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, 2 clampable wires, min. | 0.5 mm <sup>2</sup> |
| Wire connection cross section, finely stranded, two clampable wires, min.                                  | 0.5 mm <sup>2</sup> | Wire cross-section, finely stranded, two clampable wires, max.                                             | 1.5 mm <sup>2</sup> |

## Additional technical data

|                          |       |                             |         |
|--------------------------|-------|-----------------------------|---------|
| Explosion-tested version | Yes   | Number of similar terminals | 1       |
| Open sides               | right | Type of mounting            | Snap-on |

Creation date July 23, 2024 10:46:14 AM CEST

## WDU 2.5 BL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## CSA rating data

|                               |                |                               |        |
|-------------------------------|----------------|-------------------------------|--------|
| Certificate No. (CSA)         | 200039-1057876 | Current size C (CSA)          | 20 A   |
| Voltage size C (CSA)          | 600 V          | Wire cross section max. (CSA) | 12 AWG |
| Wire cross section min. (CSA) | 26 AWG         |                               |        |

## Conductors for clamping (additional connection)

Connection type, additional connection Screw connection

## Conductors for clamping (rated connection)

|                                                              |                                        |                              |                       |        |  |
|--------------------------------------------------------------|----------------------------------------|------------------------------|-----------------------|--------|--|
| Blade size                                                   | 0.6 x 3.5 mm                           |                              |                       |        |  |
| Clampable conductor                                          | Connection specification               |                              | Screw connection      |        |  |
|                                                              | Cross-section for conductor connection | Type                         | solid, H05(07) V-U    |        |  |
|                                                              |                                        | min.                         | 0.5 mm <sup>2</sup>   |        |  |
|                                                              |                                        | max.                         | 4 mm <sup>2</sup>     |        |  |
|                                                              |                                        | nominal                      | 2.5 mm <sup>2</sup>   |        |  |
|                                                              | wire end ferrule                       | Stripping length             | min.                  | 10 mm  |  |
|                                                              |                                        |                              | max.                  | 10 mm  |  |
|                                                              |                                        |                              | nominal               | 10 mm  |  |
|                                                              |                                        | Tightening torque            | min.                  | 0.4 Nm |  |
|                                                              |                                        |                              | max.                  | 0.8 Nm |  |
|                                                              |                                        | Recommended wire-end ferrule |                       |        |  |
|                                                              | Connection specification               |                              | Screw connection      |        |  |
|                                                              | Cross-section for conductor connection | Type                         | stranded, H07V-R      |        |  |
|                                                              |                                        | min.                         | 1.5 mm <sup>2</sup>   |        |  |
|                                                              |                                        | max.                         | 4 mm <sup>2</sup>     |        |  |
|                                                              |                                        | nominal                      | 2.5 mm <sup>2</sup>   |        |  |
|                                                              | wire end ferrule                       | Stripping length             | min.                  | 10 mm  |  |
|                                                              |                                        |                              | max.                  | 10 mm  |  |
|                                                              |                                        |                              | nominal               | 10 mm  |  |
|                                                              |                                        | Tightening torque            | min.                  | 0.4 Nm |  |
|                                                              |                                        |                              | max.                  | 0.8 Nm |  |
|                                                              |                                        | Recommended wire-end ferrule |                       |        |  |
|                                                              | Connection specification               |                              | Screw connection      |        |  |
|                                                              | Cross-section for conductor connection | Type                         | flexible, H05(07) V-K |        |  |
|                                                              |                                        | min.                         | 0.5 mm <sup>2</sup>   |        |  |
|                                                              |                                        | max.                         | 2.5 mm <sup>2</sup>   |        |  |
|                                                              |                                        | nominal                      | 2.5 mm <sup>2</sup>   |        |  |
|                                                              | wire end ferrule                       | Stripping length             | min.                  | 10 mm  |  |
|                                                              |                                        |                              | max.                  | 10 mm  |  |
|                                                              |                                        |                              | nominal               | 10 mm  |  |
|                                                              |                                        | Tightening torque            | min.                  | 0.4 Nm |  |
|                                                              |                                        |                              | max.                  | 0.8 Nm |  |
|                                                              |                                        | Recommended wire-end ferrule |                       |        |  |
| Clamping range, max.                                         | 4 mm <sup>2</sup>                      |                              |                       |        |  |
| Clamping range, min.                                         | 0.05 mm <sup>2</sup>                   |                              |                       |        |  |
| Clamping screw                                               | M 2.5                                  |                              |                       |        |  |
| Connection cross-section, stranded, max.                     | 4 mm <sup>2</sup>                      |                              |                       |        |  |
| Connection cross-section, stranded, min. 1.5 mm <sup>2</sup> |                                        |                              |                       |        |  |
| Connection direction                                         | on side                                |                              |                       |        |  |
| Gauge to IEC 60947-1                                         | A3                                     |                              |                       |        |  |

Creation date July 23, 2024 10:46:14 AM CEST

## WDU 2.5 BL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

|                                                                                         |                     |
|-----------------------------------------------------------------------------------------|---------------------|
| Number of connections                                                                   | 2                   |
| Stripping length                                                                        | 10 mm               |
| Tightening torque, max.                                                                 | 0.8 Nm              |
| Tightening torque, min.                                                                 | 0.4 Nm              |
| Torque level with DMS electric screw-driver                                             | 1                   |
| Twin wire-end ferrules, max.                                                            | 1.5 mm <sup>2</sup> |
| Twin wire-end ferrules, min.                                                            | 0.5 mm <sup>2</sup> |
| Type of connection                                                                      | Screw connection    |
| Wire connection cross section AWG, max.                                                 | AWG 12              |
| Wire connection cross section AWG, min.                                                 | AWG 30              |
| Wire connection cross section, finely stranded, max.                                    | 4 mm <sup>2</sup>   |
| Wire connection cross section, finely stranded, min.                                    | 0.5 mm <sup>2</sup> |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 2.5 mm <sup>2</sup> |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.5 mm <sup>2</sup> |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 2.5 mm <sup>2</sup> |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.5 mm <sup>2</sup> |
| Wire connection cross-section, solid core, max.                                         | 4 mm <sup>2</sup>   |
| Wire connection cross-section, solid core, min.                                         | 0.5 mm <sup>2</sup> |

## General

|                                         |        |                                         |               |
|-----------------------------------------|--------|-----------------------------------------|---------------|
| Rail                                    | TS 35  | Standards                               | IEC 60947-7-1 |
| Wire connection cross section AWG, max. | AWG 12 | Wire connection cross section AWG, min. | AWG 30        |

## Rating data

|                                              |                     |                                 |               |
|----------------------------------------------|---------------------|---------------------------------|---------------|
| Rated cross-section                          | 2.5 mm <sup>2</sup> | Rated voltage                   | 800 V         |
| Rated DC voltage                             | 800 V               | Rated current                   | 24 A          |
| Current at maximum wires                     | 32 A                | Standards                       | IEC 60947-7-1 |
| Volume resistance according to IEC 60947-7-x | 1.33 mΩ             | Rated impulse withstand voltage | 8 kV          |
| Power loss in accordance with IEC 60947-7-x  | 0.77 W              | Pollution severity              | 3             |

## UL rating data

|                                         |        |                                         |        |
|-----------------------------------------|--------|-----------------------------------------|--------|
| Certificate No. (UR)                    | E60693 | Conductor size Factory wiring max. (UR) | 12 AWG |
| Conductor size Factory wiring min. (UR) | 30 AWG | Conductor size Field wiring max. (UR)   | 12 AWG |
| Conductor size Field wiring min. (UR)   | 28 AWG | Current size B (UR)                     | 25 A   |
| Current size C (UR)                     | 25 A   | Voltage size B (UR)                     | 600 V  |
| Voltage size C (UR)                     | 600 V  |                                         |        |

## WDU 2.5 BL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000897    | ETIM 7.0    | EC000897    |
| ETIM 8.0    | EC000897    | ETIM 9.0    | EC000897    |
| ECLASS 9.0  | 27-14-11-20 | ECLASS 9.1  | 27-14-11-20 |
| ECLASS 10.0 | 27-14-11-20 | ECLASS 11.0 | 27-14-11-20 |
| ECLASS 12.0 | 27-14-11-20 | ECLASS 13.0 | 27-25-01-01 |
| ECLASS 14.0 | 27-25-01-01 |             |             |

## Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| REACH SVHC             | /                           |
| RoHS Compliance Status | Compliant without exemption |

## Approvals

Approvals



|                           |            |
|---------------------------|------------|
| ROHS                      | Conform    |
| UL File Number Search     | UL Website |
| Certificate No. (UR)      | E60693     |
| Certificate No. (cURusEX) | E184763    |

**WDU 2.5 BL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Technical data****Downloads**

|                                             |                                                              |
|---------------------------------------------|--------------------------------------------------------------|
| Approval/Certificate/Document of Conformity | <a href="#">Attestation of Conformity</a>                    |
|                                             | <a href="#">IECEX Certificate</a>                            |
|                                             | <a href="#">UKCA Ex Attestation of Conformity</a>            |
|                                             | <a href="#">CB Testreport</a>                                |
|                                             | <a href="#">CB Certificate</a>                               |
|                                             | <a href="#">DNVGL certificate</a>                            |
|                                             | <a href="#">NEMKO certificate</a>                            |
|                                             | <a href="#">Lloyds Register Certificate</a>                  |
|                                             | <a href="#">POLSKIREJ certificate</a>                        |
|                                             | <a href="#">UKCA Ex Certificate</a>                          |
|                                             | <a href="#">16-AV4BO-0265U</a>                               |
|                                             | <a href="#">CE Declaration of Conformity</a>                 |
|                                             | <a href="#">ATEX Certificate</a>                             |
|                                             | <a href="#">UKCA declaration of conformity</a>               |
|                                             | <a href="#">Confirmation of Standards EN 45545-2_2020-10</a> |
| Engineering Data                            | <a href="#">CAD data – STEP</a>                              |
| Engineering Data                            | <a href="#">Zuken E3.S</a>                                   |
| User Documentation                          | <a href="#">NTI WDU/WPE 2.5.pdf</a>                          |
|                                             | <a href="#">Usage of terminals in EXi atmospheres</a>        |
|                                             | <a href="#">StorageConditionsTerminalBlocks</a>              |
| Catalogues                                  | <a href="#">Catalogues in PDF-format</a>                     |
| Brochures                                   |                                                              |

### WDU 2.5 BL

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

