

Area of Application

ESSVE Combi screw is intended for mounting in drywall boards against wooden or steel joists. Drill capacity 0.4-0.9 mm.

Description

The screw is produced in hardened carbon steel with bright zinc plated surface treatment. It is equipped with Philips crosshead Ph2.

Installation

A screwdriver with a depth stop should be used for quick and efficient installation.


Recommended rpm:
30-55 mm 2800-6000/min.



Specification

Material	Hardened steel SAE C1018
Surface treatment	Bright zinc plated 5 µm
Usage	Approx 20 per m ²
Corrosion category	C1

Combi screw for wooden/steel joists, bright zinc plated ESSBOX

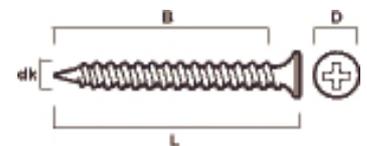

Item no.	Dimension dk x L mm	D mm	B mm	Bit no	ESSBOX size	Qty/ pack.	Pack./ large pack.
534630	3.9 x 30	8.4	25.0	PH2	202	250	12
534640	3.9 x 40	8.4	35.0	PH2	203	250	8
534655	3.9 x 55	8.4	50.0	PH2	203	200	8
534130	3.9 x 30	8.4	25.0	PH2	304	1000	4
534141	3.9 x 40	8.4	35.0	PH2	304	900	4
534155	3.9 x 55	8.4	50.0	PH2	304	500	4

Plastic bucket

Item no.	Dimension dk x L mm	D mm	B mm	Bit no	Qty/pack.
534231	3.9 x 30	8.4	25.0	PH2	2700
534241	3.9 x 40	8.4	35.0	PH2	1800

Small package

Item no.	Dimension dk x L mm	D mm	B mm	Bit no	Qty/ pack.	Pack./ large pack.
513301	3.9 x 30	8.4	25.0	PH2	100	6
513302	3.9 x 40	8.4	35.0	PH2	100	6
513304	3.9 x 55	8.4	50.0	PH2	100	6