

Area of Application

ESSVE Wafer head screw with drillpoint designed for the installation of sheet materials indoors against steel joists. Drill capacity 0.7-2.0 mm.

in the colours, bright, black or white. Also available with surface treatment of CorrSeal, which makes it possible to use outdoors. It is equipped with Philips crosshead Ph2.

Description

The screw is produced in hardened carbon steel with bright zinc plated surface treatment

Installation

Recommended rpm:
400-1200/min

Specification

	Bright zinc plated	Painted	CorrSeal
Material	Hardened steel SAE C1022.	Hardened steel SAE C1022	Hardened steel SAE C1022
Surface treatment	Bright zinc plated 5 µm	White or black finish	CorrSeal
Corrosion categories	C1	C1-C2	C4




CorrSeal

ESSVE CorrSeal surface treatment.



Type approved by SITAC No. 0075/05

Wafer head screw with drillpoint, bright zinc plated ESSBOX

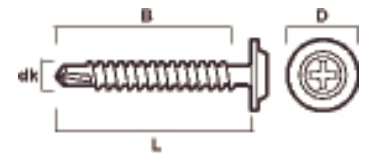

Item no.	Dimension dk×L mm	D mm	B mm	Bit no	ESSBOX size	Qty./ pack.	Pack./ large pack.
562313	4,2 × 13	11,0	13,0	PH2	202	250	12
562113	4,2 × 13	11,0	13,0	PH2	204	1000	6
562316	4,2 × 16	11,0	16,0	PH2	202	250	12
562319	4,2 × 19	11,0	19,0	PH2	202	250	12
562125	4,2 × 25	11,0	25,0	PH2	304	1000	4
562133	4,2 × 32	11,0	32,0	PH2	304	800	4

Small package

Item no.	Dimension dk× L mm	D mm	B mm	Bit no	Drill capacity mm	Qty./ pack.
513327	4,2 × 13	11,0	13,0	Ph2	0,7-2,0	25
513328	4,2 × 25	11,0	25,0	Ph2	0,7-2,0	25