

PSM-ME-RS485/RS485-P - Repeater



2744429

<https://www.phoenixcontact.com/pc/products/2744429>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Repeater, for potential separation and range increase in RS-485 2-wire bus systems, 3-way isolation, rail-mountable

Product description

The performance and availability of bus systems can be significantly increased by using repeaters. In addition to electrical isolation, bus segmentation with repeaters makes it possible to multiply the permissible coverage of the network and to extend the number of devices. The **PSM-ME-RS485/RS485-P** compact repeater is for universal use in RS-485 2-wire bus systems. The device supports bus systems that rely on the UART/NRZ data format with a character length of 10 or 11 bits.

Your advantages

- Mounting on standard EN DIN rails
- Transmission speeds of up to 1.5 Mbps
- High-quality 3-way isolation between all interfaces
- Space-saving slim 22.5 mm device
- Integrated, connectable termination resistors
- All connections can be plugged in using a COMBICON screw terminal block
- Shipbuilding approval in accordance with DNV GL

Commercial data

Item number	2744429
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	DNC111
Catalog page	Page 423 (C-6-2019)
GTIN	4017918171797
Weight per piece (including packing)	199.1 g
Weight per piece (excluding packing)	188.8 g
Customs tariff number	85176200
Country of origin	DE

PSM-ME-RS485/RS485-P - Repeater



2744429

<https://www.phoenixcontact.com/pc/products/2744429>

Technical data

Notes

Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

Utilization restriction

CCCex note	Use in potentially explosive areas is not permitted in China.
------------	---

Product properties

Product type	Interface converter
Application	RS-485
MTTF	1808 Years (SN 29500 standard, temperature 25°C, operating cycle 21%)
	796 Years (SN 29500 standard, temperature 40°C, operating cycle 34.25%)
	334 Years (SN 29500 standard, temperature 40°C, operating cycle 100%)

Insulation characteristics

Pollution degree	2
------------------	---

Electrical properties

Electrical isolation	VCC // RS-485 (A) // RS-485 (B)
Maximum power dissipation for nominal condition	2.16 W
Test voltage data interface/power supply	1.5 kV _{rms} (50 Hz, 1 min.)

Supply

Supply voltage range	18 V AC/DC ... 30 V AC/DC (via pluggable COMBICON screw terminal block)
Nominal supply voltage	24 V AC/DC
Typical current consumption	90 mA (24 V DC)
Max. current consumption	100 mA

Connection data

Supply

Single conductor/terminal point, rigid	0.2 mm ² ... 2.5 mm ²
Single-wire/terminal point, flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section, flexible [AWG]	24 ... 12
Tightening torque	0.56 Nm ... 0.79 Nm

Interfaces

Bit distortion	< 1.5 %
Bit distortion, input	max. ± 35 %
Bit distortion, output	< 3.6 %

PSM-ME-RS485/RS485-P - Repeater



2744429

<https://www.phoenixcontact.com/pc/products/2744429>

Bit delay	< 200 ns
Signal	Modbus
Transmission channels	2 (1/1), TD, RD, half duplex

Data: RS-485 interface, in acc. with EIA/TIA-485, DIN 66259-4/RS-485 2-wire

Serial transmission speed	1.2 / 2.4 / 4.8 / 9.6 / 19.2 / 38.4 / 57.6 / 75 / 93.75 / 115.2 / 136 / 187.5 / 375 / 500 / 1500 kbps
Connection method	Pluggable screw connection
Transmission length	≤ 1200 m (depends on transmission speed, bus system and cable type)
Cascadability	9 (4,8 ... 93,75 kbps)
	8 (115.2 kbps)
	7 (136 kbps)
	6 (187.5 kbps)
	5 (375 ... 1500 kbps)
Termination resistor	390 Ω
	180 Ω
	390 Ω (Can be connected)
Single-wire/terminal point, flexible	0.2 mm² ... 2.5 mm²
Max. AWG conductor cross section, flexible	12
Min. AWG conductor cross section, flexible	24
Transmission medium	2-wire twisted pair, shielded
File format/coding	UART (11/10 bit switchable; NRZ)
Data direction switching	Automatic control, min. station response time 1 bits
Protocols supported	transparent protocol

Data: RS-485 interface, in acc. with EIA/TIA-485, DIN 66259-4/RS-485 2-wire

Serial transmission speed	1.2 / 2.4 / 4.8 / 9.6 / 19.2 / 38.4 / 57.6 / 75 / 93.75 / 115.2 / 136 / 187.5 / 375 / 500 / 1500 kbps
Transmission length	≤ 1200 m (depends on transmission speed, bus system and cable type)
Cascadability	9 (4,8 ... 93,75 kbps)
	8 (115.2 kbps)
	7 (136 kbps)
	6 (187.5 kbps)
	5 (375 ... 1500 kbps)
Single-wire/terminal point, flexible	0.2 mm² ... 2.5 mm²
Max. AWG conductor cross section, flexible	12
Min. AWG conductor cross section, flexible	24
Transmission medium	2-wire twisted pair, shielded
File format/coding	UART (11/10 bit switchable; NRZ)
Data direction switching	Automatic control, min. station response time 1 bits
Protocols supported	transparent protocol

Dimensions


PSM-ME-RS485/RS485-P - Repeater



2744429

<https://www.phoenixcontact.com/pc/products/2744429>

Dimensional drawing



Width	22.5 mm
Height	99 mm
Depth	114.5 mm

Material specifications

Color (Housing)	green (RAL 6021)
Material (Housing)	PA 6.6-FR

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	≤ 5000 m (For restrictions, see the manufacturer's declaration for altitude operation)
Permissible humidity (operation)	10 % ... 95 % (non-condensing)

Approvals

CE

Certificate	CE-compliant
-------------	--------------

ATEX

Identification	⊕ II 3 G Ex nA IIC T4 Gc
Certificate	IBExU16ATEXB004 X
Note	Please follow the special installation instructions in the documentation!

IECEx

Identification	Ex nA IIC T4 Gc
Certificate	IECEx IBE 15.0034X

UL, USA/Canada

Identification	508 Recognized
	Class I, Div. 2, Groups A, B, C, D
	Class I, Zone 2, AEx nA IIC T4
	Class I, Zone 2, Ex nA IIC T4 Gc X

KC approval for South Korea

Certificate	KCC-REI-PCK-FL2744429
-------------	-----------------------

PSM-ME-RS485/RS485-P - Repeater



2744429

<https://www.phoenixcontact.com/pc/products/2744429>

Corrosive gas test

Identification	ISA-S71.04-1985 G3 Harsh Group A
----------------	----------------------------------

Shipbuilding

Identification	DNV GL
----------------	--------

DNV GL data

Temperature	B
Humidity	A
Vibration	A
EMC	B
Enclosure	Required protection according to the Rules shall be provided upon installation on board

EMC data

Noise immunity	EN 61000-6-2:2005
Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Noise emission	EN 61000-6-4

Electrostatic discharge

Standards/regulations	EN 61000-4-2
-----------------------	--------------

Electrostatic discharge

Contact discharge	± 6 kV (Test Level 3)
Discharge in air	± 8 kV (Test Level 3)
Indirect discharge	± 6 kV (Test Level 3)
Comments	Criterion B

Electromagnetic HF field

Standards/regulations	EN 61000-4-3
-----------------------	--------------

Electromagnetic HF field

Frequency range	26 MHz ... 3 GHz (Test Level 3)
Field intensity	10 V/m
Comments	Criterion A

Fast transients (burst)

Standards/regulations	EN 61000-4-4
-----------------------	--------------

Fast transients (burst)

Input	± 4 kV (Test Level 3)
Signal	± 2 kV (Test Level 3)
Comments	Criterion B

Surge current load (surge)

Standards/regulations	EN 61000-4-5
-----------------------	--------------

Surge current load (surge)

PSM-ME-RS485/RS485-P - Repeater



2744429

<https://www.phoenixcontact.com/pc/products/2744429>

Input	± 0.5 kV (DC supply)
Signal	± 2 kV (Data line, asymmetrical)
Comments	Criterion B

Conducted interference

Standards/regulations	EN 61000-4-6
-----------------------	--------------

Conducted interference

Frequency range	0.15 MHz ... 80 MHz
Comments	Criterion A
Voltage	10 V

Emitted interference

Standards/regulations	EN 55011
Comments	Class A, industrial applications

Criteria

Criterion A	Normal operating behavior within the specified limits.
Criterion B	Temporary impairment to operational behavior that is corrected by the device itself.

Mounting

Mounting type	DIN rail mounting
---------------	-------------------

PSM-ME-RS485/RS485-P - Repeater


2744429

<https://www.phoenixcontact.com/pc/products/2744429>




Drawings

Circuit diagram

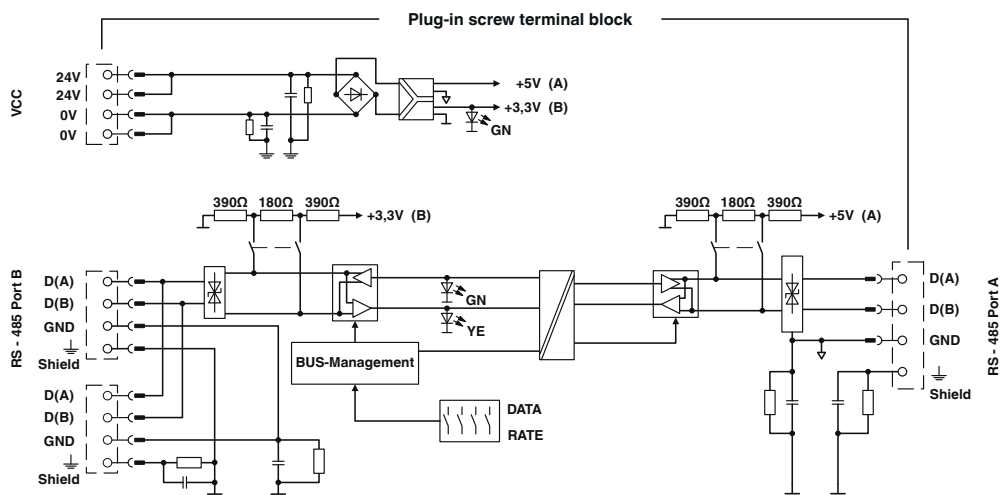

Application drawing

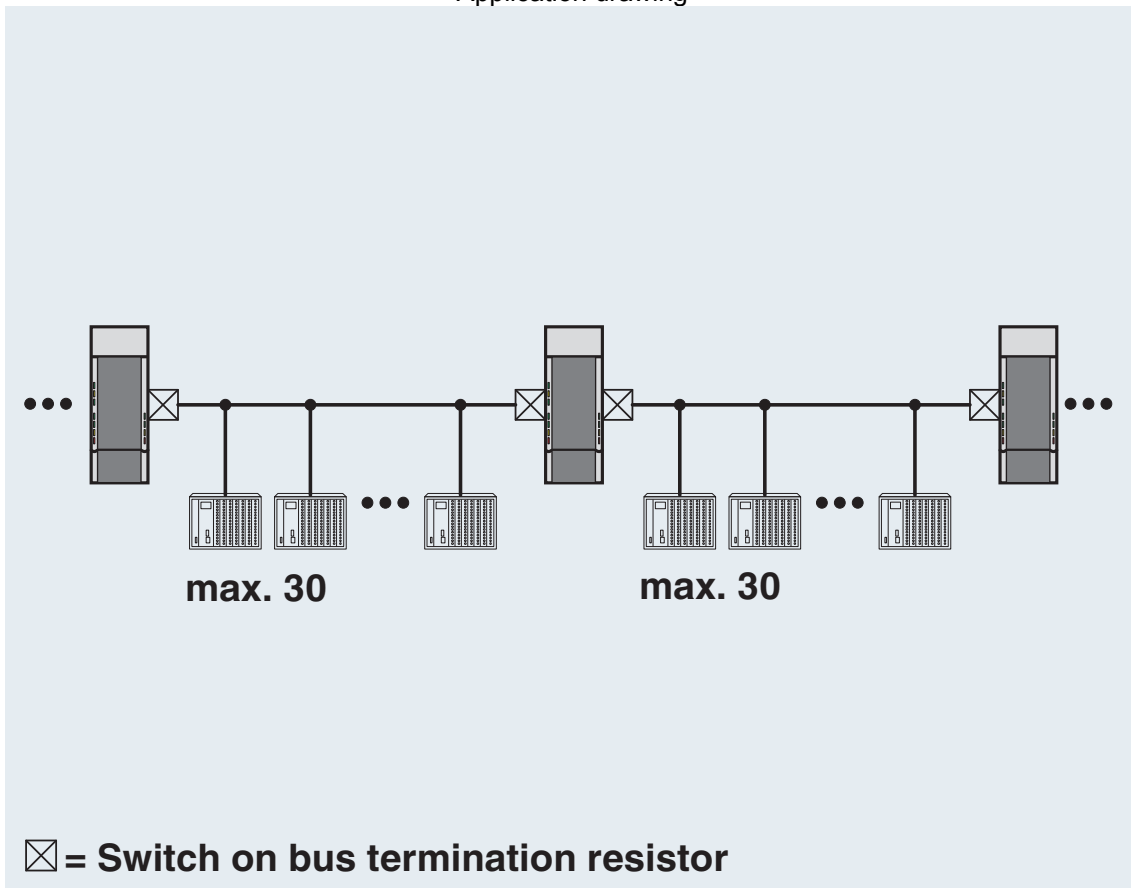


Line structure

PSM-ME-RS485/RS485-P - Repeater

2744429

<https://www.phoenixcontact.com/pc/products/2744429>

Schematic diagram

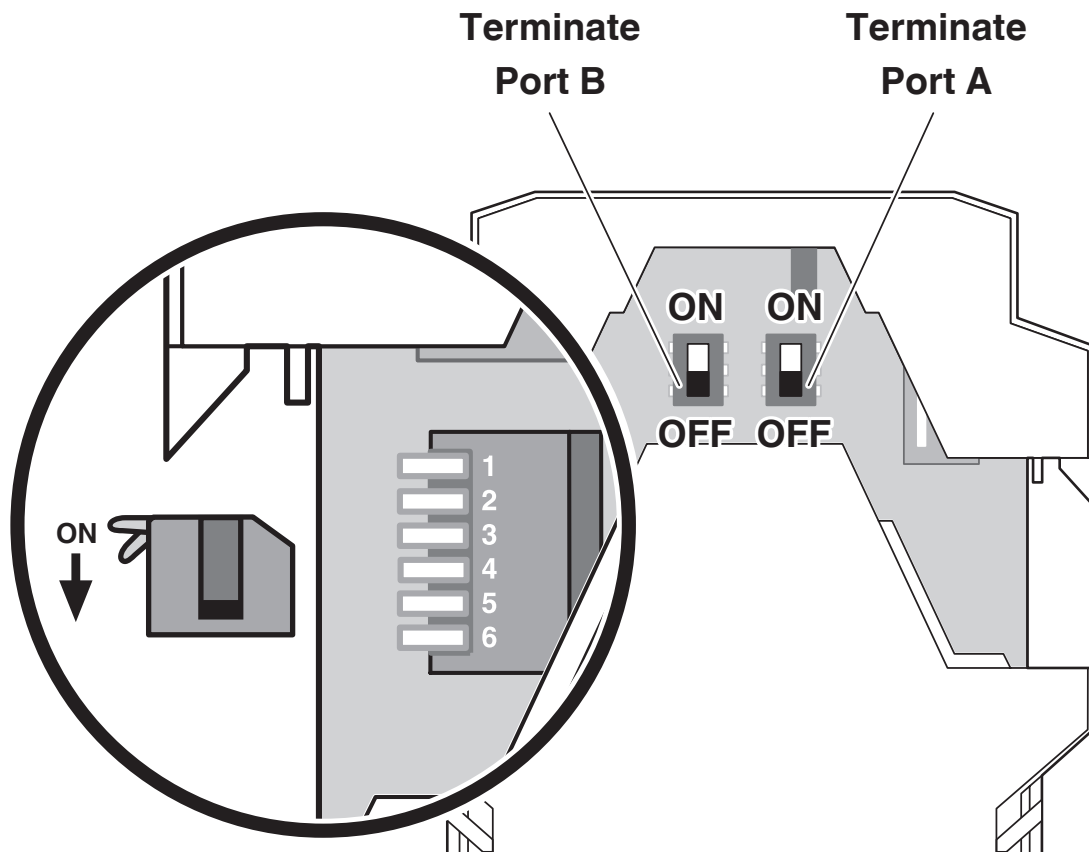

DIP switches


PSM-ME-RS485/RS485-P - Repeater

2744429

<https://www.phoenixcontact.com/pc/products/2744429>



Schematic diagram

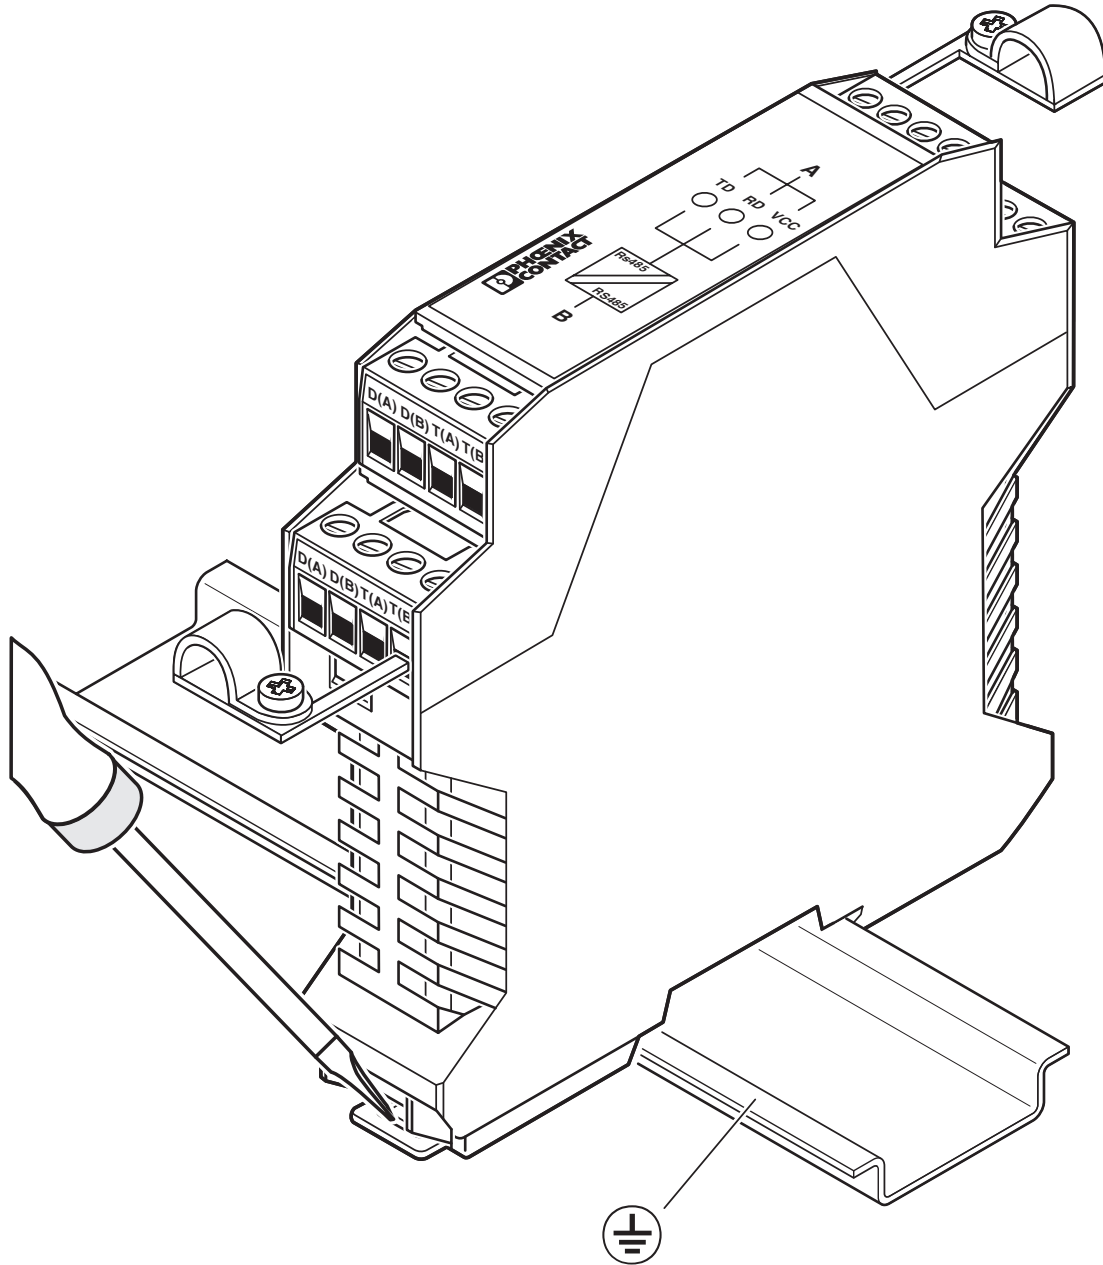

Removal


PSM-ME-RS485/RS485-P - Repeater



2744429


<https://www.phoenixcontact.com/pc/products/2744429>

Connection diagram

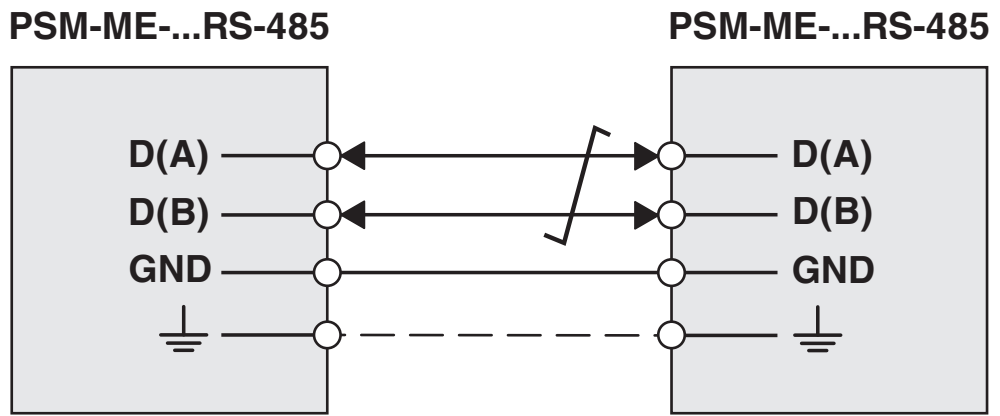

RS-485 interface

Dimensional drawing

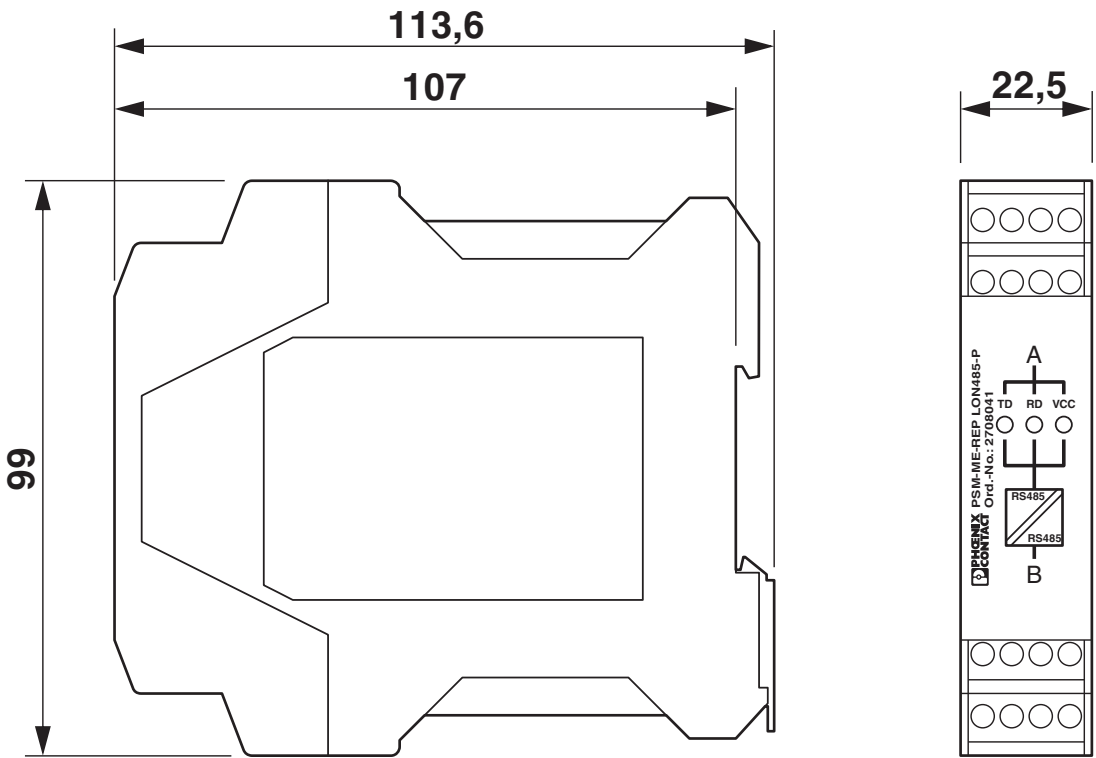

Slim design


PSM-ME-RS485/RS485-P - Repeater

2744429

<https://www.phoenixcontact.com/pc/products/2744429>



Application drawing

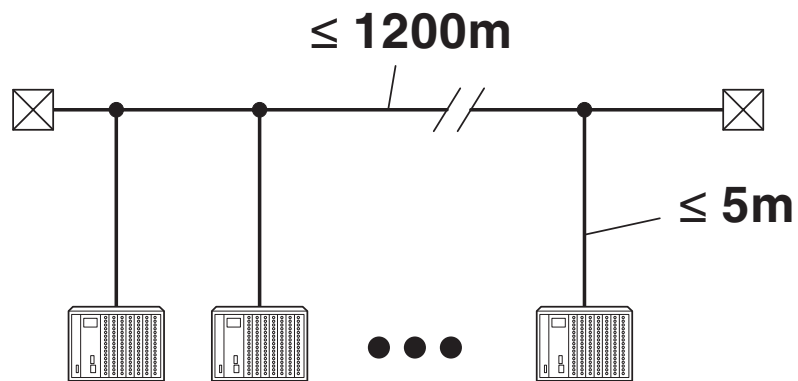

Cable lengths according to the RS-485 standard

PSM-ME-RS485/RS485-P - Repeater



2744429

<https://www.phoenixcontact.com/pc/products/2744429>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/2744429>



cUL Recognized
Approval ID: FILE E 238705



UL Recognized
Approval ID: FILE E 238705



DNV GL
Approval ID: TAA00001KR



KC
Approval ID: KCC-REI-PCK-FL274442



EAC
Approval ID: TR TS_D_01871-19

UAE-RoHS
Approval ID: 23-02-63194

	cUL Recognized Approval ID: FILE E 199827			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	24 V	0.09 A	-	-



IECEx
Approval ID: IECEx IBE 15.0034 X



cUL Listed
Approval ID: FILE E 199827



UL Listed
Approval ID: FILE E 199827



ATEX
Approval ID: IBExU 16 ATEX B004 X

PSM-ME-RS485/RS485-P - Repeater



2744429

<https://www.phoenixcontact.com/pc/products/2744429>

cULus Recognized

cULus Listed

PSM-ME-RS485/RS485-P - Repeater



2744429

<https://www.phoenixcontact.com/pc/products/2744429>

Classifications

ECLASS

ECLASS-11.0	27242208
ECLASS-12.0	27242208
ECLASS-13.0	27242208

ETIM

ETIM 9.0	EC001423
----------	----------

UNSPSC

UNSPSC 21.0	43222600
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	b200ca38-45c4-46eb-aeff-1f9e8c2e30dd
EF3.0 Climate Change	
CO2e kg	3.683 kg CO2e

PSM-ME-RS485/RS485-P - Repeater



2744429

<https://www.phoenixcontact.com/pc/products/2744429>

Accessories

ME-SAS - Shield connection clamp

2853899

<https://www.phoenixcontact.com/pc/products/2853899>

Shield connection clamp for terminal points starting from 2.5 mm²



SZF 1-0,6X3,5 - Screwdriver

1204517

<https://www.phoenixcontact.com/pc/products/1204517>

Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip



PSM-ME-RS485/RS485-P - Repeater

2744429

<https://www.phoenixcontact.com/pc/products/2744429>



PSI-TERMINATOR-PB-TBUS - Termination resistor

2702636

<https://www.phoenixcontact.com/pc/products/2702636>



Active termination resistor for PROFIBUS and RS-485 bus systems, redundant power supply, routing of the supply voltage via DIN rail connector, electrical isolation, switchable termination, integrated programming interface

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com