

# Clara With HF sensor

## Product description:

- Clara is a LED luminaire with HF sensor, for ceiling and wall mounting.
- Clara has an IK class of 10 and is an ideal luminaire for mounting in storage rooms, utility rooms, workshops, etc.
- Clara has a hidden HF sensor and can be adjusted with lux, distance and time delay.
- It is possible to connect several Clara luminaires with/without HF sensor, which turns on when the HF sensor is activated in a "master" luminaire.
- Spacers can be purchased for visible cable installation.


**IK10 IP44**



**HF sensor with slave function!**

## Technical data:

Outside dimensions:	Ø300 mm
Height:	112 mm
Voltage:	220-240VAC 50 Hz
System power:	16W
Luminous flux:	1200lm/ 1350lm
Dimmable:	No
Color Rendering Index:	Ra>80
Beam angle:	120°
IK Class:	IK10
Protection:	Class II, IP44
Material:	PC Plastic (UV-resistant)
Through-wiring:	Yes (3G1.5 mm <sup>2</sup> )
Approvals:	LVD, EMC, RoHS, CE

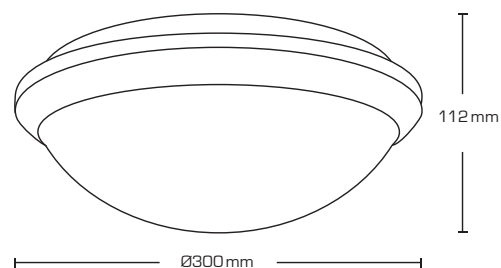

Spacers, 15 pcs. in a bag.  
[3 pcs. per. luminaire]. Item no.: 12419

## HF sensor:

Time range:	10 sec. +/-3 sec. to 12 min +/-1 min
Detection range:	1 - 8 m
Detection area:	360°
Lux range:	<3 - 2000 LUX

Item no.:	EAN no.:	Description:	Lumen:	Kelvin:	Color:
11301	5713080113014	With HF sensor	1200 lumen	3000K	White
11303	5713080113038	With HF sensor	1350 lumen	4000K	White
12419	5713080124195	Spacers (15 pcs.)			White
12418	5713080124188	Cover			White

