


Product Datasheet

Characteristic

LV480841

Auxiliary contact, FuPacT ISFT100-630 / ISFL250-1250, 1 changeover contact NO/NC, 2A

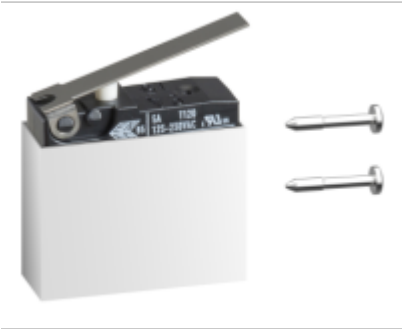

Main

Range	FuPacT
product or component type	Auxiliary contact
Device application	Remote indication
Range compatibility	FuPacT ISFT100N fuse-switch disconnecter FuPacT ISFT100 fuse-switch disconnecter FuPacT ISFT250 fuse-switch disconnecter FuPacT ISFT400 fuse-switch disconnecter FuPacT ISFT630 fuse-switch disconnecter FuPacT ISFL250 fuse-switch disconnecter FuPacT ISFL400 fuse-switch disconnecter FuPacT ISFL630 fuse-switch disconnecter FuPacT ISFL1250 fuse-switch disconnecter
Auxiliary contacts type	Standard
input type	Changeover contact
Signal contacts composition	1 NO/NC

Complementary

[Ie] rated operational current	AC-12: 6 A at 24 V AC-12: 6 A at 48 V AC-12: 6 A at 110 V AC-12: 6 A at 220/240 V AC-15: 2 A at 24 V AC-15: 2 A at 48 V AC-15: 2 A at 110 V AC-15: 2 A at 220/240 V DC-12: 3 A at 24 V DC-12: 1 A at 48 V DC-12: 0.4 A at 110 V DC-12: 0.2 A at 220/240 V
Minimum load	3 mA at 24 V
[Ui] rated insulation voltage	250 V
Kit composition	Mounting accessory Housing
Standards	IEC 60947-5-1

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	0.800 cm

Package 1 Width	2.400 cm
Package 1 Length	3.200 cm
Package 1 Weight	7.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	100
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	960.000 g
Unit Type of Package 3	P12
Number of Units in Package 3	1600
Package 3 Height	45.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	27.360 kg