

DII gG 20A/500V



Specifications

ETI Code	002312406
Description	DII gG 20A/500V
Class name	Fuse link
Rated current (A)	20
Type	D
Size	DII
Characteristics	gG
Rated AC voltage (V)	500
Rated DC voltage (V)	250
Dimensions	E27
Indicator	Top fuse status indicator
Breaking capacity AC (kA)	50
Breaking capacity DC (kA)	8
Power dissipation (W)	2,60
Standards	DIN EN 60269-1, DIN EN 60269-3
efuse	1

Online product page 

Other documentation



Technical data catalogue

Certificate

Instruction manual


CE declaration

Eplan file


ETIM international clasification

Classification	EC000099
Class name	D-system fuse link
Max. rated operation voltage Ue AC	500
Rated voltage DC	250
Breaking capacity	50
Type of fuse status indicator	Top fuse status indicator
Construction size	DII
Rated current	20A
Rated voltage	500V
Colour code	Blue
Release characteristic	Time-lag (T)


Melting energy characteristics

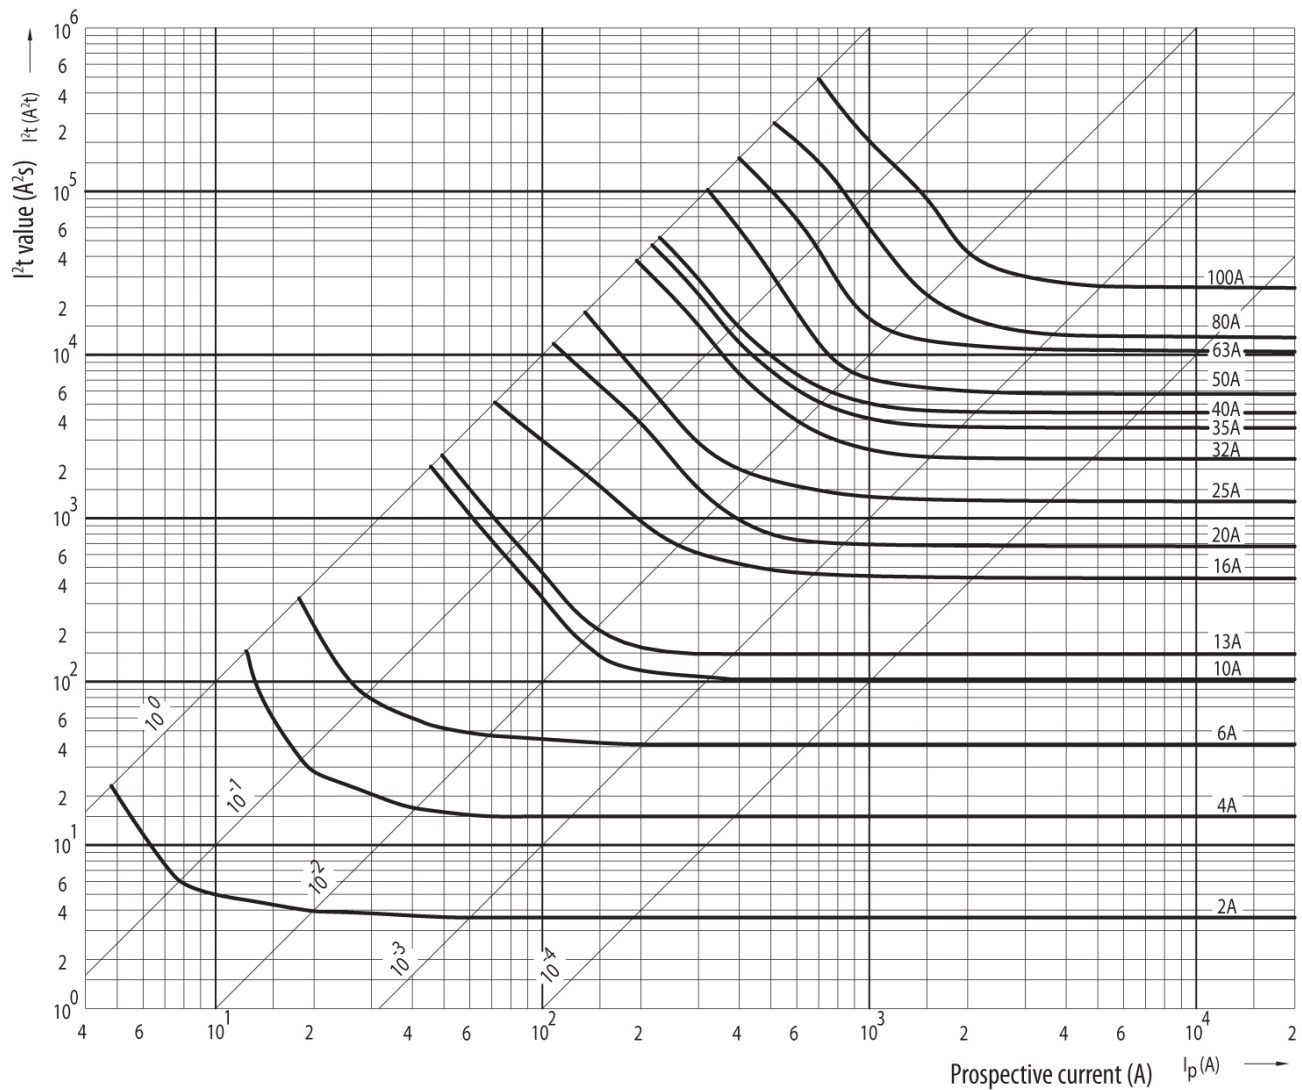

Characteristics

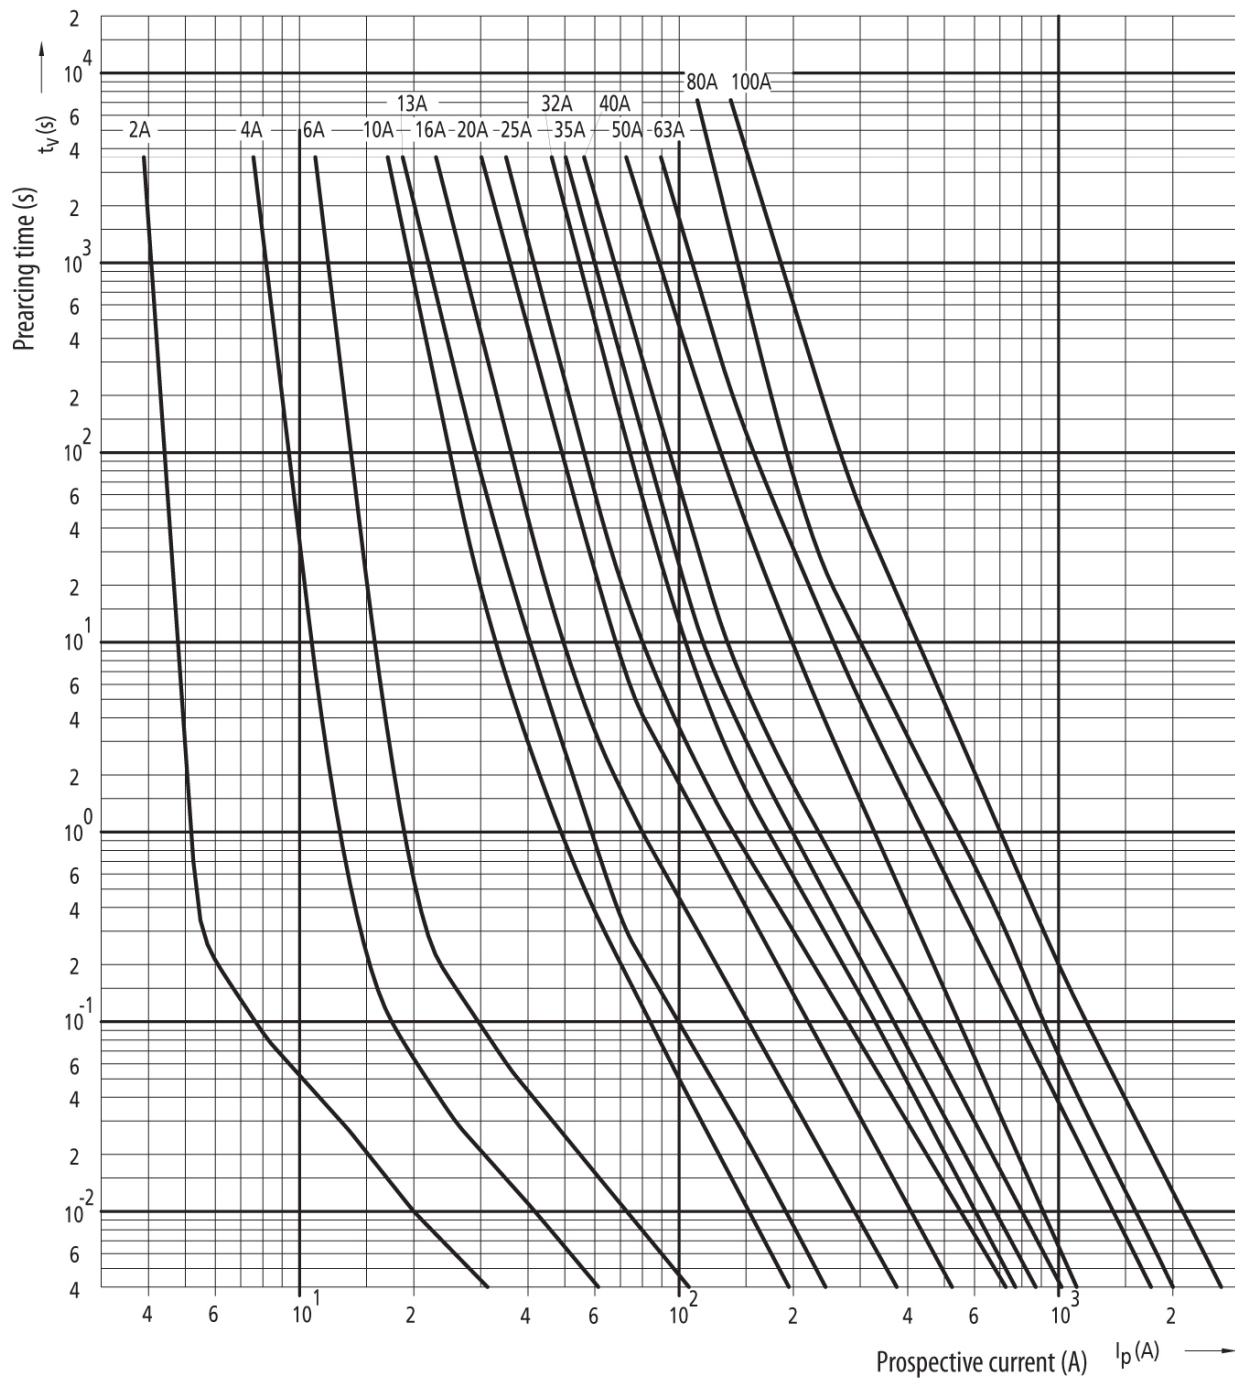

Dimension drawing

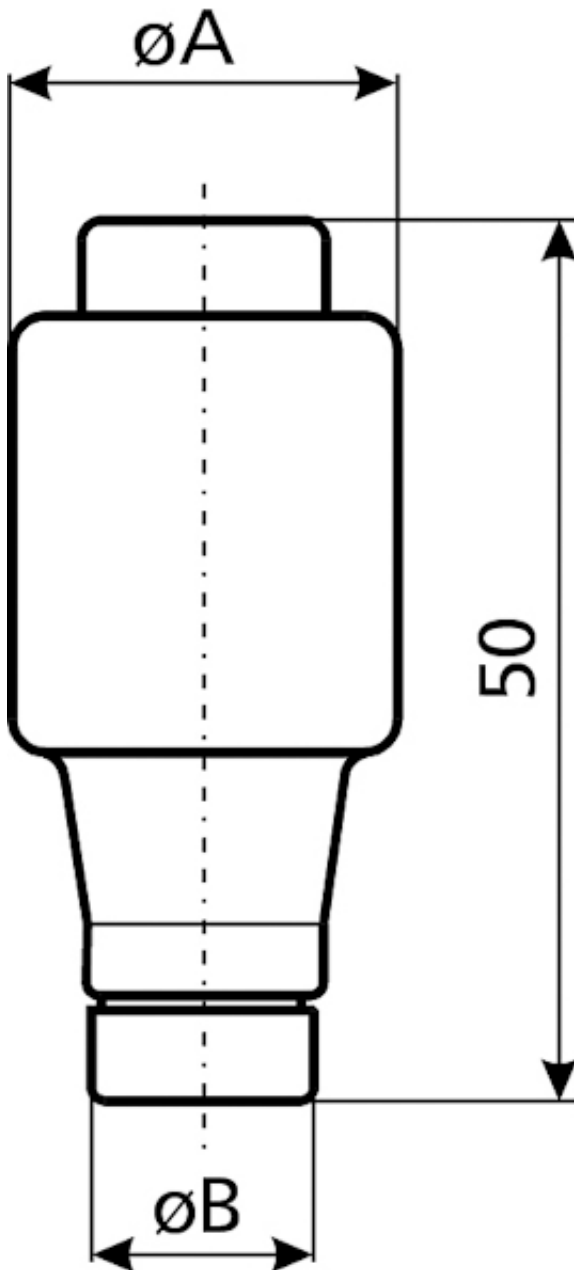

[A]	$\varnothing A$	$\varnothing B$
2	21,5	6
4	21,5	6
6	21,5	6
10	21,5	8
13	21,5	8
16	21,5	10
20	21,5	12
25	21,5	14

Cut-off current characteristics

