


DISC LED

High-bays



Images for the product family and options:



Description:

Suspended high-bay low-cost LED luminaire
 Light distribution type: direct
 Optical system: lens, 90°, polycarbonate, impact resistance
 Housing: die-cast aluminium
 Colour: black (RAL 9011)

General data:

Mains voltage: 220-240V, 50-60Hz
 LED lifetime, h: 50000/L70B50
 SDCM: 6
 Protection class IEC: I
 Ingress protection code: IP65
 Mechanical impact resistance: IK08
 Operating temperature range, °C: ta -20...+40

Installation:

Suspended (suspension hook included). Cable, 0.5m, 3x1.0mm²
 DALI: Suspended (suspension hook included). Two cables, 0.5m, 3x1.00mm² and 2x1.00mm²

Environment:

Indoor

Application:

Industry, warehouse, hall

Product	Length, mm	Width, mm	Height, mm	Luminaire output*, lm	System power*, W	System efficacy*, lm/W	CRI * (Ra)	CCT*, K	Weight, kg
Disc LED1x14000 E927 T840	290	290	118	15046	96,7	156	80+	4000	2,3
Disc LED1x21000 E928 T840	336	336	127	21589	140	151	80+	4000	3,0
Disc LED1x28000 E929 T840	376	376	131	28991	189,5	153	80+	4000	4,0
Disc LED1x14000 E927 T840 DALI	290	290	118	15046	96,7	156	80+	4000	2,4
Disc LED1x21000 E928 T840 DALI	336	336	127	21589	140	151	80+	4000	2,4
Disc LED1x28000 E929 T840 DALI	376	376	131	28991	189,5	153	80+	4000	3,7

*Tolerance range for optical and electrical data: ±10%. Values apply to an ambient temperature of 25°C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

*Photos are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.

Available options:

T840 Colour temperature 4000K, CRI 80+
 DALI Driver with DALI interface


*note - for this model DALI option is not compatible with SWITCHDIM functionality

*note - This option comes with two tails. One for power supply, other for controls

CBF3x1.5-N m Outgoing flexible cable 3x1.5mm², length according to customer specification

CBF5x1.5-N m Outgoing flexible cable 5x1.5mm², length according to customer specification

*note - Please specify the length of outgoing cable before placing an order

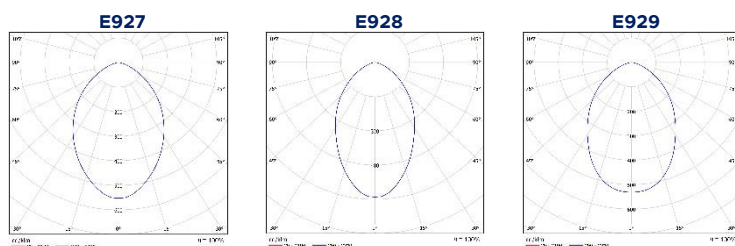

Available accessories:



Product: Power supply connector - IP66/IP68, 3x1.5mm²
Description: Quick and easy to connect power supply and luminaire cable connector - IP66/IP68, 3x1.5mm², 400V/16A, 1pcs



Product: Suspension MTG KIT - Saturn LED 1.5m
Description: Suspension kit for Saturn LED high-bay, 1.5 meter
Product: Suspension MTG KIT - Saturn LED 3.0m
Description: Suspension kit for Saturn LED high-bay, 3.0 meters
Product: Suspension MTG KIT - Saturn LED 5.0m
Description: Suspension kit for Saturn LED high-bay, 5.0 meters