


Product Datasheet

Characteristic

WDE006885

Renova - double socket outlet - 2P + E -
16 A - 250 V AC - white

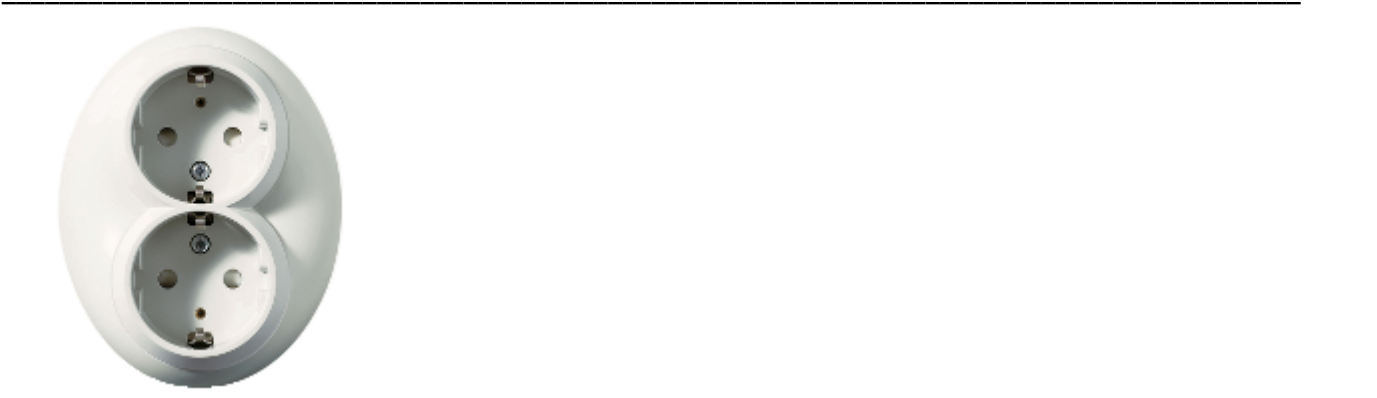

Main

Range	Renova
product or component type	Socket-outlet
device presentation	Complete product

Complementary

Socket number	2
device mounting	Flush
Outlet poles configuration	2P + E
Outlet standard	CEE 7/3
outlet standard	Schuko
Rated current	16 A
Cover type	With shutter
[Ue] rated operational voltage	250 V AC
Colour tint	White (RAL 9010)
Connections - terminals	Screw terminals
Number of loop terminals	2
Shape of screw head	Pozidriv No 1 and combi
Clamping connection capacity	1 x 1.5...2 x 2.5 mm² for solid cable(s) 1 x 1.5...2 x 2.5 mm² for solid stranded cable(s)
Material	PC/ABS
Fixing mode	By screws and claws
Diameter	83 mm
Embedding depth	22 mm
Projecting depth	22 mm

Environment

Standards	DIN VDE 0620-1 IEC 60884-1 SS 4280834 SFS 5610:2004 NEK 502:2006
Product certifications	FIMKO NEMKO SEMKO

IP degree of protection	IP20
-------------------------	------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.300 cm
Package 1 Width	11.400 cm
Package 1 Length	18.300 cm
Package 1 Weight	128.000 g

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	Free of Substances of Very High Concern above the threshold
REACH free of SVHC	Yes
EU RoHS Directive	Compliant
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 Pro-active China RoHS declaration (out of China RoHS legal scope)
RoHS exemption information	Yes
Environmental Disclosure	ENVPEP2303021EN
Circularity Profile	N/A