




**WARNING**  
CAUTION FOR ELECTRIC SHOCK/RISK OF BURN/PROPER INSTALLATION  
■ Non-professionals are not allowed to operate. Shut off the power before maintenance.

# LED-DWN-6 B/C

6W LED recessed round panel

built in power supply

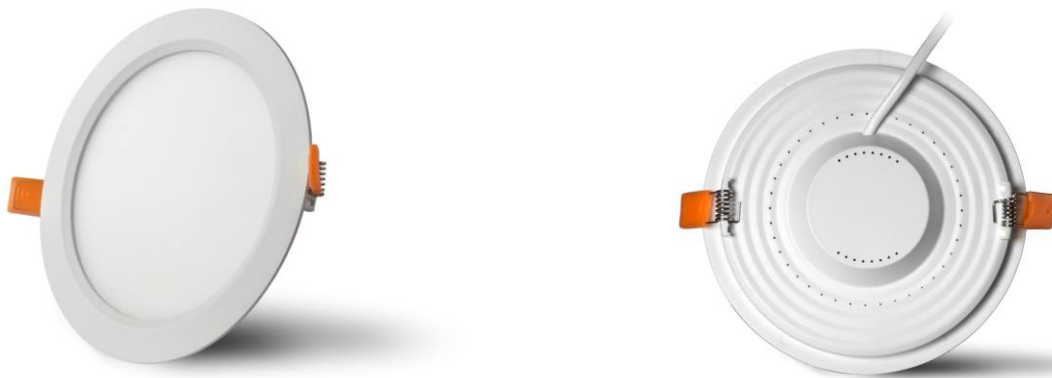

## Technical information

Input Voltage	90-264 ACV 50Hz/60Hz
CRI	>80Ra
Luminous efficacy	100 lm/w
Luminous flux	600 lm
CCT	3000K or 4500K optional
Working Temp	-20 to +45 degree C°
Relative Humidity	Min 10%, Max 90%
Input Power Factor	0.95
Harmonic Distortion	10%
Housing Material	PC housing, AL radiator
Diffuser Material	PMMA
LED Chip	Epistar SMD
Lifespan L70	≥50 000H
On/Off switching times	>100 000
Beam Angle	120°
Dimensions	Ø120*H29, Cut-out: Ø105
Protection grade	IP44 diffuser side, IP20 backside
Weight	0.1 KG
Warranty Time	2 years

