


# Product Datasheet

## Characteristic

# LUA1C11

Auxiliary contact, TeSys Ultra, 1NO + 1NC, 0 to 250VAC/DC, for Fault signalling

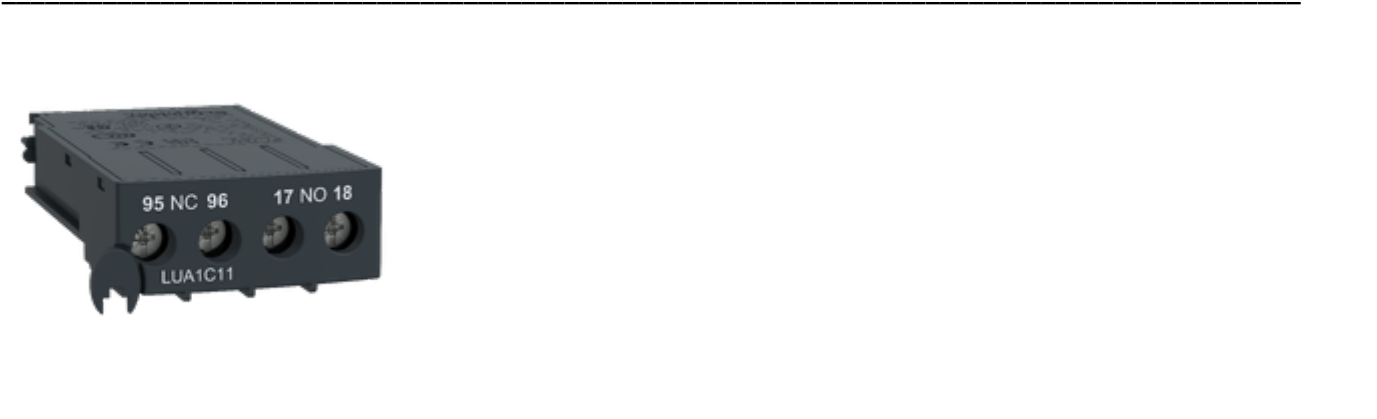

## Main

Range	TeSys
Device short name	LUA1
product or component type	Auxiliary contact

## Complementary

Auxiliary contact composition	1 NO + 1 NC
Signalling function	Fault signalling Indicating rotary knob in ready position
[Ue] rated operational voltage	<= 250 V AC <= 250 V DC
[Ui] rated insulation voltage	250 V conforming to CSA 250 V conforming to IEC 60947-5-1 250 V conforming to UL
[Ith] conventional free air thermal current	2.5 A
Minimum switching voltage	17 V
Minimum switching current	5 mA
net weight	0.03 kg
Connections - terminals	Screw clamp terminals

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.0 cm
Package 1 Width	6.0 cm
Package 1 Length	10.0 cm
Package 1 Weight	24 g
Unit Type of Package 2	S01
Number of Units in Package 2	30
Package 2 Height	15 cm
Package 2 Width	15 cm
Package 2 Length	40 cm
Package 2 Weight	998 g
Unit Type of Package 3	P06
Number of Units in Package 3	960

Package 3 Height	75.0 cm
Package 3 Width	60.0 cm
Package 3 Length	80.0 cm
Package 3 Weight	37.44 kg

Offer Sustainability

REACH Regulation	Free of Substances of Very High Concern above the threshold
REACH free of SVHC	Yes
EU RoHS Directive	Compliant
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	X
RoHS exemption information	Yes
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins