


Product Datasheet

Characteristic

LUFN11

Auxiliary contacts, TeSys Ultra, 1NO + 1NC, 250VAC/DC, Power pole status, screw terminal

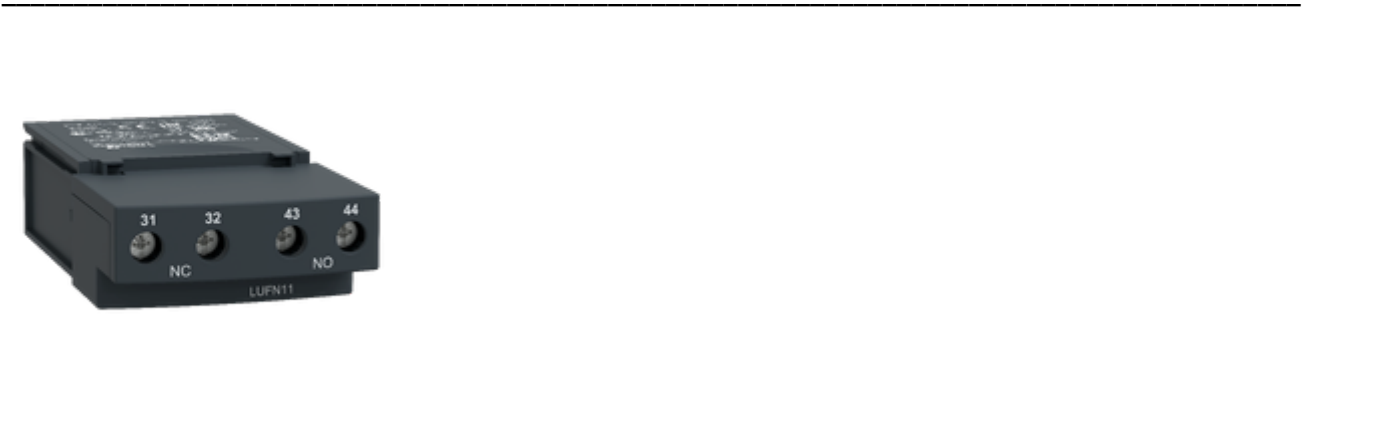

Main

Range	TeSys
Device short name	LUFN
product or component type	Auxiliary contact

Complementary

Auxiliary contact composition	1 NO + 1 NC
[Ue] rated operational voltage	<= 250 V AC <= 250 V DC
[Ui] rated insulation voltage	250 V conforming to CSA 250 V conforming to IEC 60947-5-1 250 V conforming to UL
[Ith] conventional free air thermal current	5 A
Minimum switching voltage	17 V
Minimum switching current	5 mA
net weight	0.05 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.5 cm
Package 1 Width	3.3 cm
Package 1 Length	4.8 cm
Package 1 Weight	46.0 g
Unit Type of Package 2	S02
Number of Units in Package 2	60
Package 2 Height	15.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	3.108 kg

Offer Sustainability

REACH Regulation	Free of Substances of Very High Concern above the threshold
REACH free of SVHC	Yes

EU RoHS Directive	Compliant
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	X
RoHS exemption information	Yes
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins