


Product Datasheet

Characteristic

LX9FF220

TeSys F - specific contactor coil - 220...
230 V AC 40...400 Hz low consumption

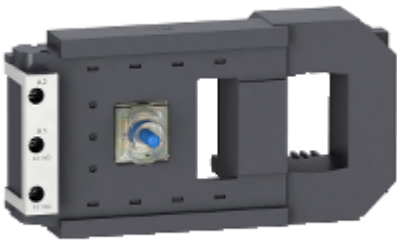

Main

Range	TeSys
product or component type	Specific contactor coil
Device short name	LX9FF
Range compatibility	TeSys TeSys F LC1F contactor
Product compatibility	LC1F115 LC1F150
Control circuit type	AC at 40...400 Hz low consumption
[Uc] control circuit voltage	220...230 V AC 40...400 Hz
Inductance of closed circuit	7.7 H
Average resistance	59.4 Ohm inrush at 20 °C 2190 Ohm holding at 20 °C
Operating time	130 ms opening 35 ms closing
Mechanical durability	10 Mcycles
Maximum operating rate	2400 cyc/h 55 °C

Complementary

Coil technology	Without built-in suppressor module
Control circuit voltage limits	Operational: 0.85...1.1 Uc (at 55 °C) Drop-out: 0.2...0.55 Uc (at 55 °C)
Inrush power in VA	690...855 VA 40...400 Hz (at 20 °C)
Hold-in power consumption in VA	6.6...8.1 VA 40...400 Hz (at 20 °C)
Heat dissipation	5.9...7.2 W

Environment

Ambient air temperature for operation	-5...55 °C
net weight	0.43 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7.3 cm

Package 1 Width	10 cm
Package 1 Length	17.8 cm
Package 1 Weight	524 g
Unit Type of Package 2	S03
Number of Units in Package 2	14
Package 2 Height	30 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	7.764 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	Free of Substances of Very High Concern above the threshold
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	X
RoHS exemption information	Yes
Environmental Disclosure	ENVPEP1505009EN
Circularity Profile	ENVEOLI1505009EN